


**For Reference Only
Reproduced at 75%
of Original Scale**

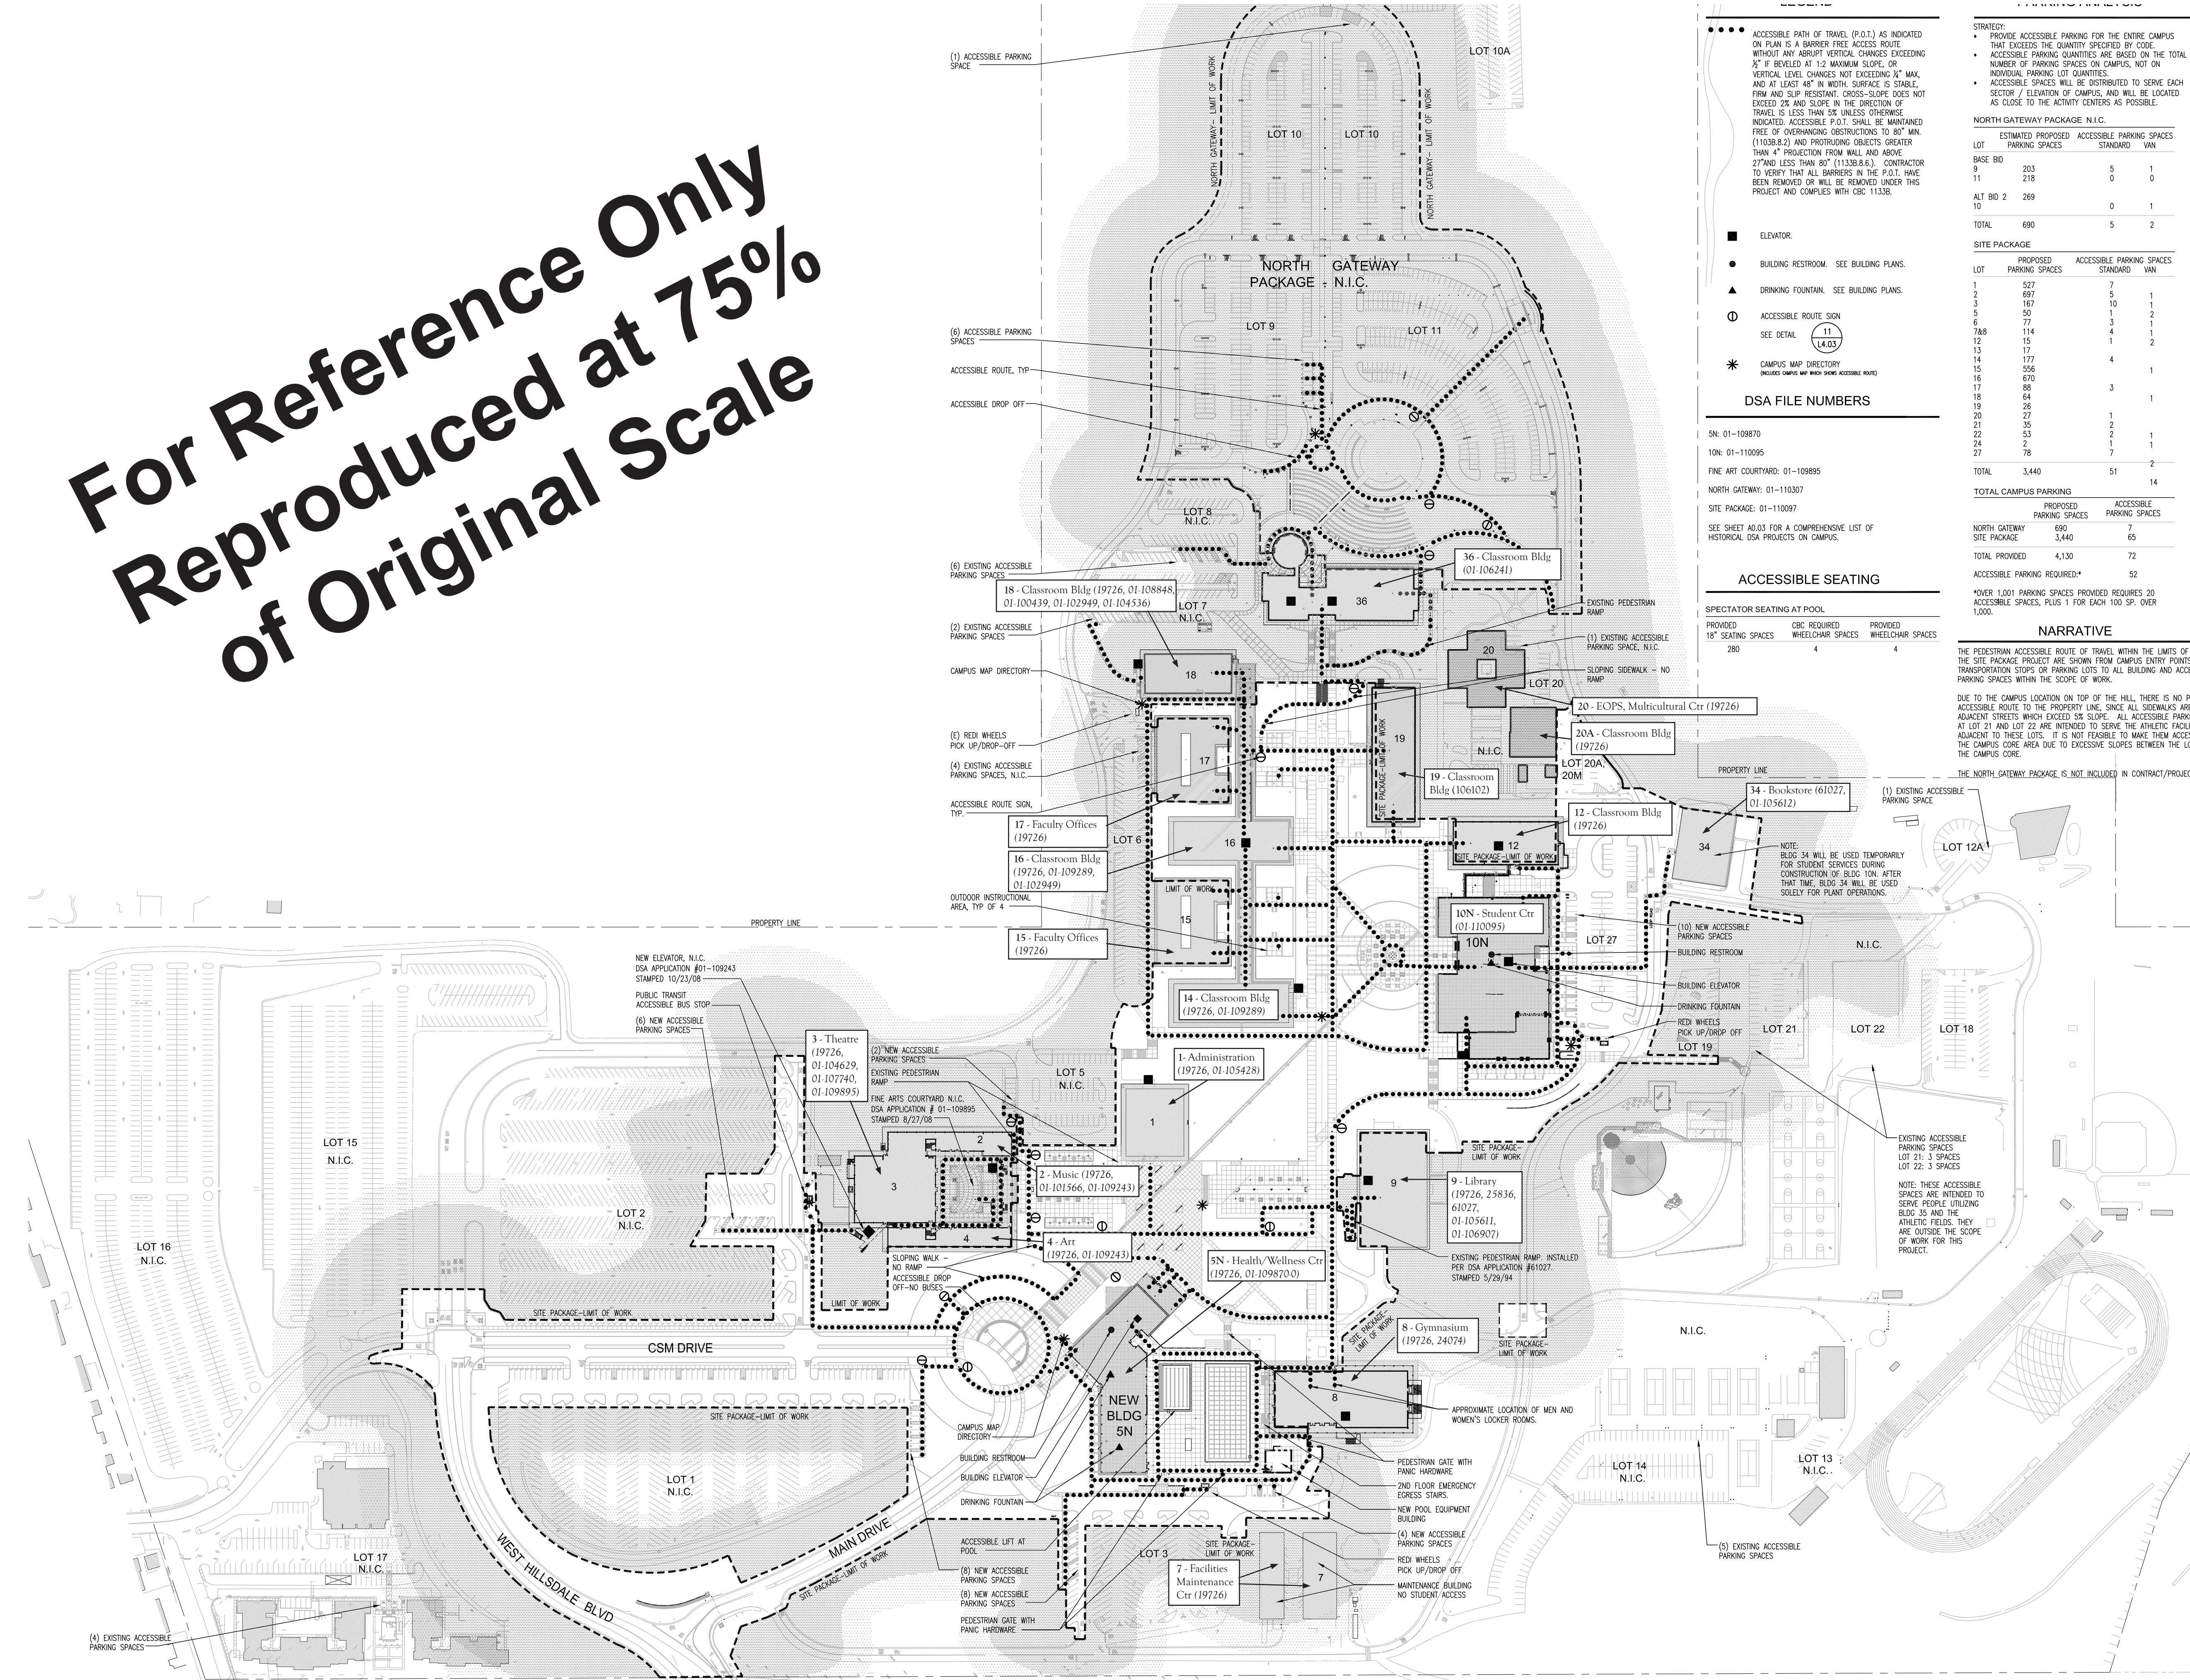

ACCESSIBLE PATH OF TRAVEL (P.O.T.) AS INDICATED ON PLAN IS A BARRIER FREE ACCESS ROUTE WITHOUT ANY ABRUPT VERTICAL CHANGES EXCEEDING 1/2" IF BEVELED AT 1:2 MAXIMUM SLOPE, OR VERTICAL LEVEL CHANGES NOT EXCEEDING 2" MAX, AND AT LEAST 48" IN WIDTH. SURFACE IS STABLE, FIRM AND SLIP RESISTANT. CROSS-SLOPE DOES NOT EXCEED 2% AND SLOPE IN THE DIRECTION OF TRAVEL IS LESS THAN 5% UNLESS OTHERWISE INDICATED. ACCESSIBLE P.O.T. SHALL BE MAINTAINED FREE OF OVERHANGING OBSTRUCTIONS TO 80" MIN. (11038.8.2) AND PROTRUDING OBJECTS GREATER THAN 4" PROJECTION FROM WALL AND ABOVE 27" AND LESS THAN 80" (11338.8.6.). CONTRACTOR TO VERIFY THAT ALL BARRIERS IN THE P.O.T. HAVE BEEN REMOVED OR WILL BE REMOVED UNDER THIS PROJECT AND COMPLIES WITH CBC 113338.

- ELEVATOR.
- BUILDING RESTROOM. SEE BUILDING PLANS.
- ▲ DRINKING FOUNTAIN. SEE BUILDING PLANS.
- ⊙ ACCESSIBLE ROUTE SIGN
SEE DETAIL (L4.03)
- * CAMPUS MAP DIRECTORY
(INCLUDES CAMPUS MAP WHICH SHOWS ACCESSIBLE ROUTE)

DSA FILE NUMBERS

5N: 01-109870
10N: 01-110095
FINE ART COURTYARD: 01-109895
NORTH GATEWAY: 01-110307
SITE PACKAGE: 01-110097

SEE SHEET A0.03 FOR A COMPREHENSIVE LIST OF HISTORICAL DSA PROJECTS ON CAMPUS.

ACCESSIBLE SEATING

PROVIDED 18" SEATING SPACES	CBC REQUIRED WHEELCHAIR SPACES	PROVIDED WHEELCHAIR SPACES
280	4	4

SPECTATOR SEATING AT POOL

STRATEGY:

- PROVIDE ACCESSIBLE PARKING FOR THE ENTIRE CAMPUS THAT EXCEEDS THE QUANTITY SPECIFIED BY CODE.
- ACCESSIBLE PARKING QUANTITIES ARE BASED ON THE TOTAL NUMBER OF PARKING SPACES ON CAMPUS, NOT ON INDIVIDUAL PARKING LOT QUANTITIES.
- ACCESSIBLE SPACES WILL BE DISTRIBUTED TO SERVE EACH SECTOR / ELEVATION OF CAMPUS, AND WILL BE LOCATED AS CLOSE TO THE ACTIVITY CENTERS AS POSSIBLE.

NORTH GATEWAY PACKAGE N.I.C.

LOT	ESTIMATED PROPOSED PARKING SPACES	STANDARD	VAN
BASE BID	203	5	1
9	218	0	0
10			
ALT BID 2	269	0	1
TOTAL	690	5	2

SITE PACKAGE

LOT	PROPOSED PARKING SPACES	ACCESSIBLE PARKING SPACES	STANDARD	VAN
1	527	7	1	
2	697	7	1	
3	167	10	1	
5	50	1	2	
6	77	3	1	
7/8	114	4	1	
12	15	1	2	
13	17			
14	177	4		
15	556			
16	670			
17	89	3		
18	64			
19	26			
20	27	1		
21	35	2		
22	53	1		
24	2	1		
27	78	7		
TOTAL	3,440	51	2	

TOTAL CAMPUS PARKING

PROPOSED PARKING SPACES	ACCESSIBLE PARKING SPACES
NORTH GATEWAY	690
SITE PACKAGE	3,440
TOTAL PROVIDED	4,130
ACCESSIBLE PARKING REQUIRED*	52
TOTAL	14

NARRATIVE

THE PEDESTRIAN ACCESSIBLE ROUTE OF TRAVEL WITHIN THE LIMITS OF WORK FOR THE SITE PACKAGE PROJECT ARE SHOWN FROM CAMPUS ENTRY POINTS SUCH AS TRANSPORTATION STOPS OR PARKING LOTS TO ALL BUILDING AND ACCESSIBLE PARKING SPACES WITHIN THE SCOPE OF WORK.

DUE TO THE CAMPUS LOCATION ON TOP OF THE HILL, THERE IS NO PEDESTRIAN ACCESSIBLE ROUTE TO THE PROPERTY LINE, SINCE ALL SIDEWALKS ARE ON ADJACENT STREETS WHICH EXCEED 5% SLOPE. ALL ACCESSIBLE PARKING SPACES AT LOT 21 AND LOT 22 ARE INTENDED TO SERVE THE ATHLETIC FACILITIES ADJACENT TO THESE LOTS. IT IS NOT FEASIBLE TO MAKE THEM ACCESSIBLE TO THE CAMPUS CORE AREA DUE TO EXCESSIVE SLOPES BETWEEN THE LOTS AND THE CAMPUS CORE.


THE NORTH GATEWAY PACKAGE IS NOT INCLUDED IN CONTRACT/PROJECT.

NOTE: BLDG 34 WILL BE USED TEMPORARILY FOR STUDENT SERVICES DURING CONSTRUCTION OF BLDG 10N. AFTER THAT TIME, BLDG 34 WILL BE USED SOLELY FOR PLANT OPERATIONS.

NOTE: THESE ACCESSIBLE SPACES ARE INTENDED TO SERVE PEOPLE UTILIZING BLDG 35 AND THE ATHLETIC FIELDS. THEY ARE OUTSIDE THE SCOPE OF WORK FOR THIS PROJECT.



McCarthy Building Companies, Inc.
343 Sansome Street, 14th Floor
San Francisco, California 94104
P 415 | 364-1339
F 415 | 397-9999

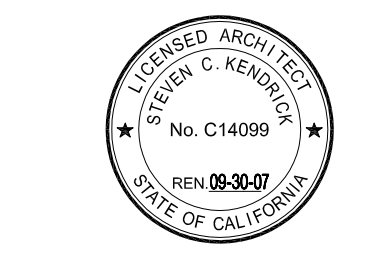

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICE

APPL. # 01-110097

AC: _____ FLS: _____ SS: _____
DATE: _____

FILE NUMBER: _____

This set of other project documents and all items, methods and design incorporated herein are instruments of service of professional documents on the registered project of LPA, KH, and McCarthy Building Companies, Inc. and are not to be used for any other project or purpose except as described in the contractual agreement between McCarthy and the Client. LPA, KH, and McCarthy Building Companies, Inc. shall not be held responsible for any errors or omissions in this set of documents or for any consequences arising therefrom. McCarthy Building Companies, Inc. shall not be held responsible for any errors or omissions in this set of documents or for any consequences arising therefrom.

© Copyright 2008

College of San Mateo
Site Package
San Mateo, CA

Developed for
San Mateo County Community College District

Date	Revision	Description
01/22/08		

Date	Revision	Description
01/22/08		

Job No.	37082.30
Date	12 NOVEMBER 2008
Drawn by	AG, DT
Checked by	LC
Scale	AS SHOWN

**ACCESSIBLE
PATH OF TRAVEL
PLAN**

R-1