


**SITE ACCESSIBILITY PLAN
PACIFIC HEIGHTS**

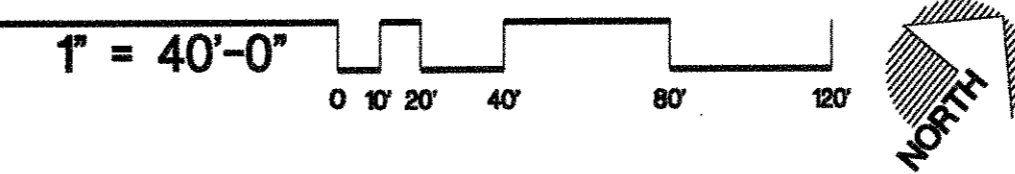

GENERAL NOTES

△ ACCESSIBLE PATH OF TRAVEL AS INDICATED ON PLAN IS A BARRIER FREE ACCESS ROUTE WITHOUT ANY ABRUPT LEVEL CHANGES EXCEEDING 1/2" BEVELED AT 1:2 MAX. SLOPE, OR VERTICAL LEVEL CHANGES NOT EXCEEDING 1/4" MAX. AND AT LEAST 48" WIDE SURFACE IS SLIP RESISTANT, SABLE FIRM AND SMOOTH. CROSS SLOPE DOES NOT EXCEED 2% AND SLOPE DOES NOT EXCEED 5% UNLESS OTHERWISE INDICATED.

CONTRACTOR TO VERIFY THAT ALL BARRIERS IN THE PATH OF TRAVEL HAVE BEEN REMOVED OR WILL BE REMOVED UNDER THIS PROJECT, AND PATH OF TRAVEL COMPLIES WITH C.B.C. 11333.

**ACCESSIBLE PARKING STALL DATA -
LOT #13**

TOTAL NUMBER OF PARKING SPACES = 144
 TOTAL NUMBER OF ACCESSIBLE STALLS REQUIRED = 5
 TOTAL NUMBER OF VAN ACCESSIBLE REQUIRED = 1
 TOTAL NUMBER OF ACCESSIBLE STALLS PROVIDED = 5
 TOTAL NUMBER OF VAN ACCESSIBLE PROVIDED = 1

KEYED NOTES (AS INDICATED BY #)

1. (E) ACCESSIBLE PARKING STALL & SIGNAGE APPROVED UNDER DSA #01-105854.
2. (E) ACCESSIBLE TOILET ROOMS W/ ACCESSIBLE DRINKING FOUNTAINS APPROVED UNDER DSA #01-105854.
3. (E) ASPHALT WALKWAY TO REMAIN
4. (E) POST & CHAIN BARRIER, APPROVED UNDER DSA# 01-105854
5. (E) STRIPING TO REMAIN.
6. (E) ACCESSIBLE PARKING STALLS AND SIGNAGE APPROVED UNDER DSA #01-105854.
7. (E) 5'-0" WIDE STRIPING FOR ACCESSIBLE PATH OF TRAVEL. 4" STRIPING PAINTED ON SURFACE, DIAGONAL LINES ARE 3'-0" O.C. MIN. - APPROVED UNDER DSA #01-105854.
8. (E) SITE ENTRANCE SIGN, DSA #01-105854.
9. (E) VAN ACCESSIBLE PARKING STALL AND SIGNAGE, APPROVED UNDER DSA #01-105854.
10. (E) A/C PAVING TO REMAIN
11. (E) ACCESSIBLE PATH OF TRAVEL, FROM PARKING TO BUILDING ENTRANCE, APPROVED UNDER DSA #01-105854.
12. DENOTES MAIN ACCESSIBLE ENTRY TO BUILDING.
13. DENOTES EDGE OF (E) PAVED AREA
14. DENOTES (E) CONG. AGGREGATE WALK TO REMAIN
15. DENOTES (E) ELECT. TRANSFORMER WITH CHAIN LINK FENCE ENCLOSURE TO REMAIN.
16. DENOTES (E) CHAIN LINK FENCE
17. DENOTES (E) CONG. SIDEWALK
18. DENOTES (E) A/C RAMP TO REMAIN
19. DENOTES (E) GROUND COVER
20. (E) 5'-0" WIDE ACCESSIBLE PEDESTRIAN PATHWAY FROM (E) BUS STOP TO BUILDING, APPROVED UNDER DSA #01-105854.
21. DENOTES (E) STRIPED CROSSWALK
22. DENOTES (E) BUS STOP
23. DENOTES (E) STRIPED FIRE LANE
24. DENOTES (E) ACCESSIBLE PATH
25. (E) BUILDING ACCESSIBLE DIRECTIONAL SIGNS, UNDER REVIEW UNDER DSA #01-105854.
26. (E) ACCESSIBLE BUILDING ENTRANCE SIGNS, UNDER REVIEW UNDER DSA #01-105854.
27. DENOTES (E) ACCESSIBLE CURB CUT RAMP
28. (E) ASPHALT DRIVEWAY IS FLUSH WITH ASPHALT DRIVEWAY AT THIS LOCATION.
29. DENOTES (E) ACCESSIBLE WALKWAY APPROVED UNDER DSA# 01-105854.
30. DENOTES (E) 4'-0" WIDE CHAIN LINK FENCE GATE
31. (E) REMOVABLE BOLLARDS, APPROVED UNDER DSA# 01-105854.

LEGEND:

← DENOTES APPROVED ACCESSIBLE PATH, DSA# 01-105854

Sugimura & Associates Architects
 Architecture • Interiors
 Landscape Architecture
 2155 South Bascom Ave., Suite 200
 Campbell, CA 95008
 408-879-0600 Fax 408-377-6066
 COPYRIGHT © 2003 Sugimura & Associates Architects



OFFICE OF REGISTERED PROFESSIONAL ARCHITECTS
 DIVISION OF PROFESSIONAL STANDARDS AND PRACTICE
 OFFICE OF REGULATION SERVICES

FILE NO. _____
 PROJECT NO. _____
 DATE _____

Division of the State Architect
 Regional Office
 1301 10th Street
 Oakland, CA 94612

**SITE ACCESSIBILITY PLAN
PACIFIC HEIGHTS**
 SKYLINE COLLEGE SWING SPACE
 PERMIT PACKAGE #3
 SKYLINE COLLEGE
 3300 COLLEGE DRIVE
 SAN BRUNO, CA 94066

REVISIONS

NO.	ITEM	DATE
△	DSA BACKCHECK	5/28/04
△	CONSTRUCTION ISSUE	6/10/04
△	CONFORM SET	6/10/04

CLIENT APPROVAL:

DRAWN BY: KH
 CHECKED BY: MDL
 JOB NO: 2145.002 DATE: 13 FEB 2004