SECURITY DOOR SCHEDULE						
SHEET NUMBER	FLOOR	DOOR NUMBER	DETAIL SHEET	SECURITY CONFIGURATION	COMMENTS	
SY2.01	LEVEL 1	30A	SY5.01/1	CARD READER W/KEYPAD, MAGNETIC DOOR CONTACTS, REX	_	
SY2.01	LEVEL 1	30B	SY5.01/1	CARD READER, MAGNETIC DOOR CONTACTS, REX	_	

	SECURITY CAMERA SCH	EDULE	
CAMERA SYMBOL	DESCRIPTION	DETAIL SHEET	COMMENTS
1 2			
360	IP 360° EXTERIOR CAMERA — WALL MOUNT	SY501/4	MOUNT CAMERA AT 12' AFF

— 4—POST EQUIPMENT RACK OR EQUIPMENT CABINET NUT LOCK WASHER, AND FLAT WASHER (TYP FOR 4) HILTI KWIK BOLT TZ, WEDGE TYPE CONCRETE EXPANSION ANCHOR (TYP FOR 4) 1/2-INCH DIAMETER WITH 3-1/4-INCH EMBEDMENT

NOTE: 1. REFER TO SPECIFICATIONS FOR EQUIPMENT RACK TYPE AND SIZE.

EQUIPMENT CABINET ANCHORING SCALE: NONE

(30A)


SHEET NOTES


- 1. HOME RUN SECURITY DEVICE CABLING TO SECURITY EQUIPMENT HUB.
- 2. PROVIDE CONDUIT FROM EACH FIELD DEVICE TO SECURITY EQUIPMENT HUB. FIELD DETERMINE CONDUIT ROUTES.

NUMBERED NOTES

TELECOMMUNICATIONS:

T-1 TELECOMMUNICATIONS EQUIPMENT CABINET, REFER TO SPECIFICATION SECTION 271513 FOR REQUIREMENTS. REFER TO 2/SY2.01 FOR ANCHORING DETAILS AND STRUCTURAL CALCULATION PAGE E-1 FOR CALCULATIONS.

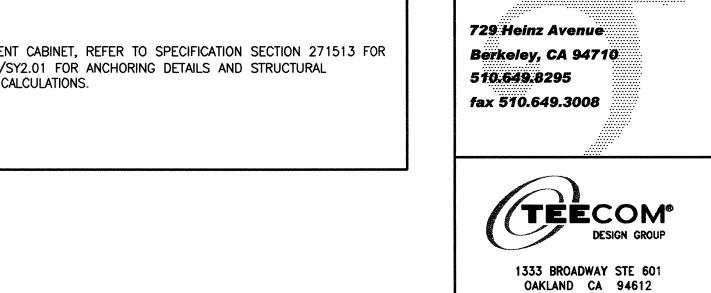



510-337-2800 510-337-2804 FAX www.teecom.com

This document contains information that is

IDENTIFICATION STAMP DIVISION OF THE STATE ARCHITECT APPLICATION NUMBER 01-111618

AC SSJEJJB

DATE 2/9/11

CALIFORNIA STATE FIRE MARSHAL APPROVED

APPROVAL OF THIS PLAN DOES NOT AUTHORIZE OR APPROVE ANY OMISSION OR DEVIATION FROM APPLICABLE REGULATIONS. FINAL APPROVAL IS SUBJECT TO FIELD INSPECTION. ONE SET OF APPROVED PLANS SHALL BE AVAILABLE ON THE PROJECT SITE AT ALL TIMES.

CAÑADA COLLEGE

Electrical Infrastructure Replacement Project

4200 Farm Hill Blvd Redwood City, CA 94061

BID SET

SHEET TITLE


Floor Plan Building 30

REVISIONS DATE DESCRIPTION

DATE January 14, 2011 DRAWN KCM
CHECKED APA 1/4" = 1'-0"

JOB NO. 2921.01 SHEET NUMBER

SY2.01

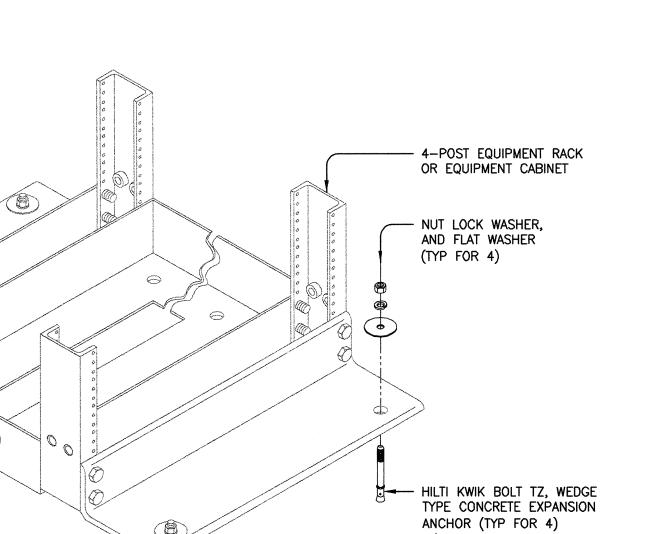

FLOOR PLAN - BUILDING 30 SCALE: 1/4"=1'-0"